


Texas Boom Company Specifications – Seaweed Boom



| Seaweed Boom |
|---|
| Floating Barrier for Sargassum |
| Diagram Illustrative Only – Not to Scale |
| |
| Free board: 13 inches |
| Draft: 36 inches |
| Section length: 100 feet |
| Segment per 100' section: 20 |
| Fabric: 22 Oz per Sq Yd Vinyl Coated Polyester PVC |
| Color: International Orange, Black or Blue |
| Skirt: Permeable 22 Oz Woven PVC Coated Polyester Mesh |
| Floatation logs: Rolled closed cell polyethylene foam |
| Top tension member: Dual 5/16 inch coated stainless steel cables |
| Ballast and bottom tension: ½ inch HDG steel chain |
| End connectors: ASTM F962-94 universal "Z" aluminum connectors on top and bottom. Lacing grommets on reinforced seams between connectors. Rope, strong zip ties, and nuts and bolts can be used to connect grommets. Bottom connector is optional. |
| Water holes: 20 |
| Anchor points: Every 25 feet |
| Section length options: 50 feet / 100 feet |

| Boom Configuration |
|---------------------------------------|
| A: Top Tension Pocket |
| B: Top Tension Cable |
| C: Cable eye with thimble |
| D: Shackle |
| E: ASTM End Connectors |
| F: One inch welds |
| G: Foam Log |
| H: Toggle Pin |
| I: Toggle Pin hole |
| J: Anchor Point |
| K: Air and water drainage hole |
| L: Chain Pocket |
| M: Ballast Chain |
| N: Grommets |

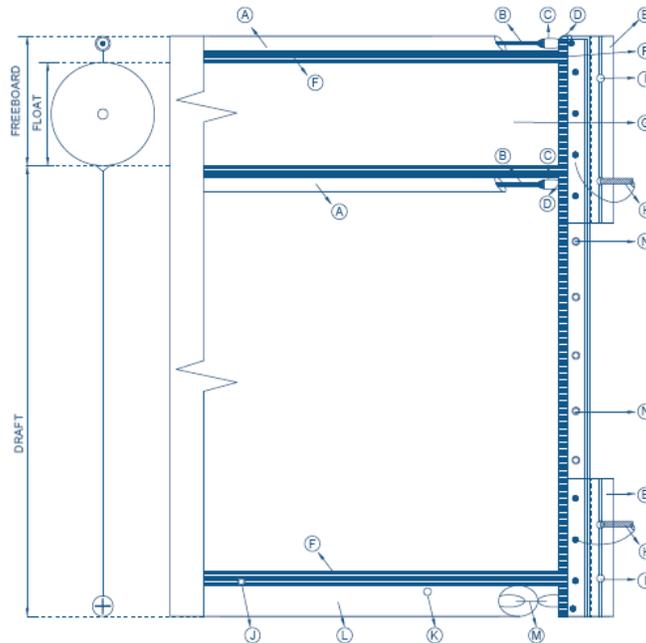

Texas Boom Company
16600 Park Row Drive
Houston, TX 77084
(281) 441-2002
sales@texasboom.com